



# SANISUB<sup>®</sup> ZPK

# SANISUB<sup>®</sup> S-ZPK

## SUBMERSIBLE PUMP



### GREY WATER

Domestic grey water, domestic chemical aggressive water (S ZPK)

10 m  
↑

### ADVANTAGES

- Solid handling capacity from 10 to 30 mm
- Portable
- Automatic release by adjustable float
- Resistance to water up to an average temperature of 90°C over a short period
- SANISUB S-ZPK: pumps for chemical aggressive or saline water (max. salt content 15%)



### APPLICATIONS

- Pumping clear water from cellars, garages, rainwater manholes...
- Portable pump for emergency pumping
- Drainage of domestic grey water without faeces (showers, washing machines, sinks, etc.)
- SANISUB S ZPK: drainage of brine water from softeners and chemical aggressive or saline water (max. 15%)

### FEATURES

- Submersible pump for grey water, polypropylene and stainless steel
- Double seal by mechanical lining and seal
- Horizontal discharge 1 ¼ MPT
- Float switch fitted as standard
- SANISUB S ZPK: mechanical lining in silicon carbide and stainless steel 316 L crankcase
- 10 m power cable
- 90° connection elbow pipe (30 A DN 25, 40 A DN 32)
- Solid handling capacity of 10 mm for ZPK & S ZPK 30 A, 30 mm for ZPK & S ZPK 40 A

### PUMP PERFORMANCE CURVE

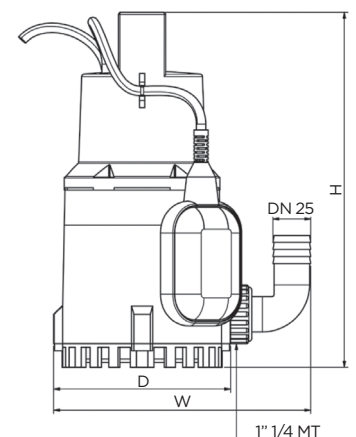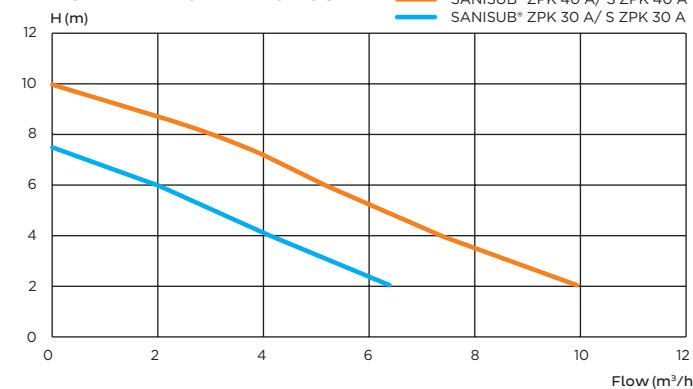

REFERENCE	EAN	FACTORY CODE	U (V)	P1 (W)	P2 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	IP RATING	Q MAX (M³/H)	H MAX (M)	WEIGHT (KG)
SANISUB ZPK 30 A	3 308 815 081 434	SANISUB-001	230	300	130	50-60	2	2,800	IP68	7	7.5	4.5
SANISUB ZPK 40 A	3 308 815 081 441	SANISUB-002								10	10	6.5
SANISUB S ZPK 30 A	3 308 815 081 458	SANISUB-003								7	7.5	4.5
SANISUB S ZPK 40 A	3 308 815 081 465	SANISUB-004								10	10	6.5