



# SANICONDENS® Best



**Flexibility:** can be used with gas or oil boilers, floor and wall boilers or dehumidifiers.

**Easy installation:**  
**Complete installation kit**

supplied with non-return valve integrated neutralisation system and alarm pre-connection.



**Integrated neutralisation system**  
**to protect pipes from acid attack.**

**Complete and compact system.**

**Quiet operation.** 

## APPLICATIONS



Boiler



Dehumidifier

## PUMPING DISTANCE

4.5 m  

 50 m

## WARRANTY



**Product Code:**  
1082/2

**Barcode:**  
EAN 3308810000454




Neutralisation granules included, if replacement granules needed


**Barcode:**  
EAN 3308815011134



### SEMI-TRANSPARENT VIEW

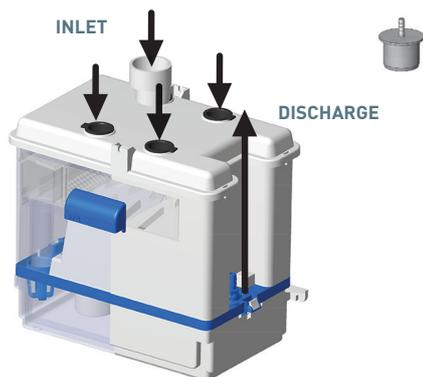

### INSTALLATION DRAWING

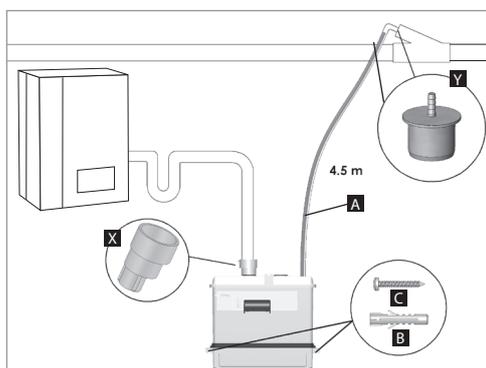

### TECHNICAL FEATURES

Ø inlet	28 mm
Number of possible inlets	4
Ø discharge pipework	8 mm
Minimum pH	2.5
Tank volume	2 l
Maximum flow	342 l/h
Maximum incoming water temperature	80°C (S3 15%)
Max power of gas boiler	50 kW
Max power of oil boiler	35 kW
Voltage	220-240 V
Supply frequency	50 Hz
Max power	60 W
Max current	0.52 A
Electrical class	Single phase
IP rating	IP20
Weight	2.6 kg
Low noise level	< 45 dB(A)

### PACKAGING

SANICONDENS® Best

Wall mounting, non-return valve supplied

**Comes with :** fixing screw, 1 inlet adapter, 1 outlet adapter (50mm), 1 drain hose (6m) and 1 power cable - 2m, 3 rubber stoppers, 1 alarm pre-connection cable.